


Performance	ENGLISH	SI	
Sensitivity (±2.0 %)	100 mV/g	10.2 mV/(m/s ²)	
Measurement Range	±50 g pk	±490 m/s ² pk	
Frequency Range (±5 %)	0.5 to 10000 Hz	0.5 to 10000 Hz	
Frequency Range (±10 %)	0.3 to 14000 Hz	0.3 to 14000 Hz	
Frequency Range (±3 dB)	0.2 to 20000 Hz	0.2 to 20000 Hz	
Resonant Frequency	≥35 kHz	≥35 kHz	
Broadband Resolution	0.004 g rms	0.039 m/s ² rms	[1]
Non-Linearity	≤1 %	≤1 %	[2]
Transverse Sensitivity	≤3 %	≤3 %	
Environmental			
Overload Limit	±5000 g pk	±49050 m/s ² pk	
Temperature Range	-65 to 250 °F	-54 to 121 °C	
Electrical			
Excitation Voltage	23 to 30 VDC	23 to 30 VDC	
Constant Current Excitation	2 to 20 mA	2 to 20 mA	
Output Impedance	<100	<100	
Output Bias Voltage	11 to 17 VDC	11 to 17 VDC	
Discharge Time Constant	2.0 to 5.0 sec	2.0 to 5.0 sec	
Settling Time (within 10% of bias)	<12.0 sec	<12.0 sec	
Spectral Noise (10 Hz)	65 µg/√8730;Hz	638 (µm/sec ² /√8730;Hz)	[1]
Spectral Noise (100 Hz)	20 µg/√8730;Hz	196 (µm/sec ² /√8730;Hz)	[1]
Spectral Noise (1 kHz)	15 µg/√8730;Hz	147 (µm/sec ² /√8730;Hz)	[1]
Physical			
Size (Height)	1 1/2 in	38.1 mm	
Weight	6.2 oz	176 gm	[1]
Sensing Element	Quartz	Quartz	
Size (Hex)	1 3/16 in	30.2 mm	
Sensing Geometry	Shear	Shear	
Housing Material	316L Stainless Steel	316L Stainless Steel	
Sealing	Welded Hermetic	Welded Hermetic	
Electrical Connector	10-32 Coaxial Jack	10-32 Coaxial Jack	
Electrical Connection Position	Side	Side	
Mounting Thread (Shaker Mount)	1/4-28 Female	1/4-28 Female	
Mounting Thread (Unit Under Test Mount)	10-32 Female	10-32 Female	

Optional Versions (Optional versions have identical specifications and accessories as listed for standard model except where noted below. More than one option maybe used.)
M - Metric Mount [4]

Notes
 [1] Typical.
 [2] Zero-based, least-squares, straight line method.
 [3] See PCB Declaration of Conformance PS023 for details.
 [4] Sensitivity referenced at 159.2 Hz.

Supplied Accessories
 080A149 Calibration adaptor, 10-32 to 5-40 (for Model 394A11 calibration standard) (1)
 081A08 Mounting Stud (10-32 to 1/4-28) (2)
 081A90 Mounting stud, 10-32 to 5-40 (2)
 081B05 Mounting Stud (10-32 to 10-32) (2)
 081B20 Mounting Stud, with shoulder (1/4-28 to 1/4-28) (2)
 ACS-1 NIST traceable frequency response (10 Hz to upper 5% point). (1)
 ACS-4 Single axis, low frequency phase and amplitude response cal from 0.5 to 10 Hz (1)
 M080A149 Mounting adaptor (10-32 to M3 x 0.50) (1)
 M081B05 Mounting Stud 10-32 to M6 X 0.75 (2)
 M081B20 Mounting Stud 1/4-28 to M6 X 0.75 (2)

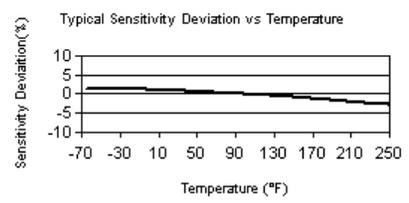

Entered: BLB	Engineer: WDC	Sales: JJB	Approved: BLB	Spec Number:
Date: 11/23/2004	Date: 11/23/2004	Date: 11/24/2004	Date: 11/24/2004	11291



3425 Walden Avenue
 Depew, NY 14043
 UNITED STATES
 Phone: 800-828-8840
 Fax: 716-684-0987
 E-mail: info@pcb.com
 Web site: www.pcb.com

All specifications are at room temperature unless otherwise specified.
 In the interest of constant product improvement, we reserve the right to change specifications without notice.

ICP® is a registered trademark of PCB group, Inc.