

	ENGLISH	SI	
Performance			
Sensitivity (±10 %)	100 mV/g	10.2 mV/(m/s ²)	
Measurement Range	±50 g pk	±490 m/s ² pk	
Frequency Range (±5 %) (y or z axis)	0.5 to 5000 Hz	0.5 to 5000 Hz	
Frequency Range (±5 %) (x axis)	0.5 to 4500 Hz	0.5 to 4500 Hz	
Frequency Range (±10)	0.3 to 6000 Hz	0.3 to 6000 Hz	
Resonant Frequency	≥25 kHz	≥25 kHz	
Phase Response (±5 °)	1.0 to 5000 Hz	1.0 to 5000 Hz	
Broadband Resolution (1 to 10000 Hz)	0.0001 g rms	0.001 m/s ² rms	[1]
Non-Linearity	≤1 %	≤1 %	[2]
Transverse Sensitivity	≤5 %	≤5 %	
Environmental			
Overload Limit (Shock)	±7000 g pk	±68600 m/s ² pk	
Temperature Range (Operating)	-65 to +176 °F	-54 to +80 °C	
Base Strain Sensitivity	0.001 g/µε	0.01 (m/s ²)/µε	[1]
Electrical			
Excitation Voltage	20 to 30 VDC	20 to 30 VDC	
Constant Current Excitation	2 to 20 mA	2 to 20 mA	
Output Impedance	≤200 Ohm	≤200 Ohm	
Output Bias Voltage	8 to 12 VDC	8 to 12 VDC	
Discharge Time Constant	1.0 to 3.0 sec	1.0 to 3.0 sec	
Settling Time (within 10% of bias)	<10 sec	<10 sec	
Spectral Noise (1 Hz)	40 µg/√Hz	392 (µm/sec ²)/√Hz	[1]
Spectral Noise (10 Hz)	10 µg/√Hz	98 (µm/sec ²)/√Hz	[1]
Spectral Noise (100 Hz)	3 µg/√Hz	29.4 (µm/sec ²)/√Hz	[1]
Spectral Noise (1 kHz)	1 µg/√Hz	9.8 (µm/sec ²)/√Hz	[1]
Spectral Noise (10 kHz)	0.5 µg/√Hz	4.9 (µm/sec ²)/√Hz	[1]
Physical			
Sensing Element	Ceramic	Ceramic	
Sensing Geometry	Shear	Shear	
Housing Material	Anodized Aluminum	Anodized Aluminum	
Sealing	Epoxy	Epoxy	
Size (Height x Length x Width)	0.55 in x 0.80 in x 0.55 in	14.0 mm x 20.3 mm x 14.0 mm	
Weight	0.26 oz	7.4 gm	[1]
Electrical Connector	1/4-28 4-Pin	1/4-28 4-Pin	
Electrical Connection Position	Side	Side	
Mounting Thread	10-32 Female	10-32 Female	
Mounting Torque	10 to 20 in-lb	113 to 225 N-cm	

Optional Versions (Optional versions have identical specifications and accessories as listed for standard model except where noted below. More than one option maybe used.)

A - Adhesive Mount
 Supplied Accessory: Model 080A109 Petro Wax
 Supplied Accessory: Model 080A90 Quick bond Gel (for use with accelerometer adhesive mtg bases to fill gaps on rough surfaces)

T - TEDS Capable of Digital Memory and Communication Compliant with IEEE P1451.4

TLA - TEDS LMS International - Free Format

TLB - TEDS LMS International - Automotive Format

TLC - TEDS LMS International - Aeronautical Format

TLD - TEDS Capable of Digital Memory and Communication Compliant with IEEE 1451.4

Temperature Range (Operating)	-65 to +176 °F	-54 to +80 °C
Output Bias Voltage	8.5 to 13.0 VDC	8.5 to 13.0 VDC


Notes

[1] Typical.
 [2] Zero-based, least-squares, straight line method.
 [3] See PCB Declaration of Conformance PS023 for details.

Supplied Accessories

080A109 Petro Wax (1)
 080A12 Adhesive Mounting Base (1)
 081B05 Mounting Stud (10-32 to 10-32) (1)
 ACS-1T NIST traceable triaxial amplitude response, 10 Hz to upper 5% frequency. (1)
 M081B05 Mounting Stud 10-32 to M6 X 0.75 (1)

Entered: LLH	Engineer: SDS	Sales: BAM	Approved: LLH	Spec Number:
Date: 02/11/2008	Date: 02/11/2008	Date: 02/11/2008	Date: 02/11/2008	10330

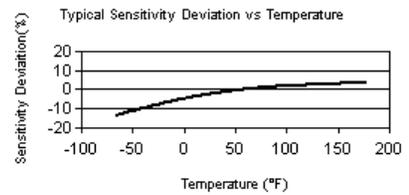

PCB PIEZOTRONICS[™]
 VIBRATION DIVISION

3425 Walden Avenue
 Depew, NY 14043
 UNITED STATES
 Phone: 800-828-8840
 Fax: 716-684-0987
 E-mail: info@pcb.com
 Web site: www.pcb.com

All specifications are at room temperature unless otherwise specified.

In the interest of constant product improvement, we reserve the right to change specifications without notice.

ICP® is a registered trademark of PCB group, Inc.