


	ENGLISH	SI	
<b>Performance</b>			
Sensitivity (±10 %)	100 mV/g	10.2 mV/(m/s <sup>2</sup> )	[2]
Measurement Range	±50 g	±490 m/s <sup>2</sup>	
Frequency Range (±3 dB)	30 to 600000 cpm	0.5 to 10000 Hz	[3]
Resonant Frequency	1500 kcpm	25 kHz	[1]
Broadband Resolution (1 to 10000 Hz)	350 µg	3434 µm/sec <sup>2</sup>	[1]
Non-Linearity	±1 %	±1 %	[4]
Transverse Sensitivity	≤7 %	≤7 %	
<b>Environmental</b>			
Overload Limit (Shock)	5000 g pk	49050 m/s <sup>2</sup> pk	
Temperature Range	-65 to +250 °F	-54 to +121 °C	
Enclosure Rating	IP68	IP68	
<b>Electrical</b>			
Settling Time (within 1% of bias)	≤2.0 sec	≤2.0 sec	
Discharge Time Constant	≥0.3 sec	≥0.3 sec	
Excitation Voltage	18 to 28 VDC	18 to 28 VDC	
Constant Current Excitation	2 to 20 mA	2 to 20 mA	
Output Impedance	<150 Ohm	<150 Ohm	
Output Bias Voltage	8 to 12 VDC	8 to 12 VDC	
Spectral Noise (10 Hz)	8 µg/√Hz	78.5 (µm/sec <sup>2</sup> )/√Hz	[1]
Spectral Noise (100 Hz)	5 µg/√Hz	49.1 (µm/sec <sup>2</sup> )/√Hz	[1]
Spectral Noise (1 kHz)	4 µg/√Hz	39.2 (µm/sec <sup>2</sup> )/√Hz	[1]
Electrical Isolation (Case)	>10 <sup>8</sup> Ohm	>10 <sup>8</sup> Ohm	
<b>Physical</b>			
Size (Hex x Height)	11/16 in x 1.65 in	18 mm x 42.2 mm	
Weight	1.8 oz	51 gm	
Mounting Thread	1/4-28 Female	No Metric Equivalent	[5]
Mounting Torque	2 to 5 ft-lb	2.7 to 6.8 Nm	
Sensing Element	Ceramic	Ceramic	
Sensing Geometry	Shear	Shear	
Housing Material	Stainless Steel	Stainless Steel	
Sealing	Welded Hermetic	Welded Hermetic	
Electrical Connector	2-Pin MIL-C-5015	2-Pin MIL-C-5015	
Electrical Connection Position	Top	Top	

<b>Optional Versions</b> (Optional versions have identical specifications and accessories as listed for standard model except where noted below. More than one option maybe used.)		
<b>EX</b> - Hazardous Area Approval- contact factory for specific approvals		
Hazardous Area Approval	CI I, Div 2, Groups A, B, C, D; ExnL IIC T4, AExnA IIC T4	CI I, Div 2, Groups A, B, C, D; ExnL IIC T4, AExnA IIC T4
Hazardous Area Approval	EEx nL IIC T4, - 40°C≤Ta≤121°C, II 1 G	EEx nL IIC T4, - 40°C≤Ta≤121°C, II 1 G
Hazardous Area Approval	CI I, Div I, Groups A, B, C, D; CI II, Div I, Groups E, F, G; CI III, Div I	CI I, Div I, Groups A, B, C, D; CI II, Div I, Groups E, F, G; CI III, Div I
Hazardous Area Approval	Exia IIC T4, AExia IIC, T4	Exia IIC T4, AExia IIC, T4
Hazardous Area Approval	EEx nL IIC T4, - 40°C≤Ta≤121°C, II 3 G	EEx nL IIC T4, - 40°C≤Ta≤121°C, II 3 G
<b>M</b> - Metric Mount		
Supplied Accessory: Model M081A61 Mounting stud, 1/4-28 to M6 x 1		
<b>TO</b> - Temperature Output		
Temperature Output Range	+36 to +250 °F	+2 to +121 °C
Temperature Scale Factor	5.56 mV/°F + 32	(+10 mV/°C)
Electrical Connector	3-Pin MIL-C-5015	3-Pin MIL-C-5015
Electrical Connections (Pin A)	Acceleration	Acceleration
	Output	Output
Electrical Connections (Pin B)	Ground	Ground
Electrical Connections (Pin C)	Temperature	Temperature
	Output	Output
Size (Height)	1.86 in	47.2 in
Weight	2.0 oz	56.7 oz
<b>Notes</b>		
[1] Typical.		
[2] Conversion Factor 1g = 9.81 m/s <sup>2</sup> .		
[3] The high frequency tolerance is accurate within ±10% of the specified frequency.		
[4] Zero-based, least-squares, straight line method.		
[5] 1/4-28 has no equivalent in S.I. units.		
[6] See PCB Declaration of Conformance PS023 or PS060 for details.		
<b>Supplied Accessories</b>		
081A40 Mounting Stud ( )		
ICS-2 NIST-traceable single-axis single-point amplitude response calibration at 6000 cpm (100 Hz) (1)		

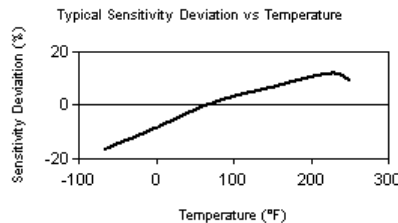

All specifications are at room temperature unless otherwise specified. In the interest of constant product improvement, we reserve the right to change specifications without notice. ICP® is a registered trademark of PCB group, Inc.

Entered: LLH	Engineer: JEC	Sales: NJF	Approved: LLH	Spec Number:
Date: 01/29/2007	Date: 01/31/2007	Date: 01/31/2007	Date: 02/02/2007	<b>13145</b>



3425 Walden Avenue  
Depew, NY 14043  
UNITED STATES  
Phone: 716-684-0003  
Fax: 716-684-3823

E-mail: [imi@pcb.com](mailto:imi@pcb.com)

Web site: [www.imi-sensors.com](http://www.imi-sensors.com)